




PIM Rated Omni Ceiling Mount SISO Antenna: 698-2700 MHz + 5G (3 GHz & 5 GHz)

- Super-Low PIM SISO Antenna / 3G, 4G, LTE + 5G
- Lowest PIM Rated SISO
- Supports All Carrier Bands + 5G (3 GHz & 5 GHz)



SISO for 698-2700 MHz + 5G

- Greater antenna performance
- Frequency band for multiple carrier deployment / 3G, 4G, LTE + 5G
- Incorporates Venti Group Patented Technologies

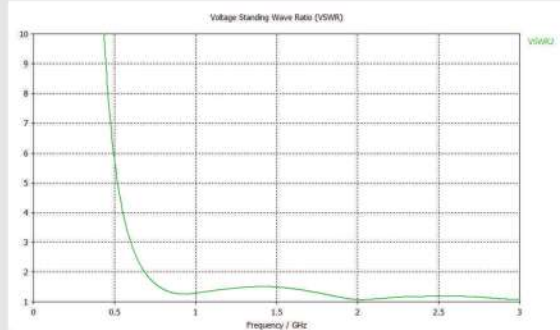

Available in iBwave Designer Version 6.0 and higher

SPECIFICATIONS

Frequency Range:	698-960 MHz / 1710-2700 MHz / 3-3.625 GHz / 5.5-6.0 GHz
Polarization:	Vertical
VSWR (typical)/ Impedance:	698 to 800 MHz ≤ 1.8:1 800 to 2700 MHz ≤ 1.5:1 3 to 3.625 GHz ≤ 1.5:1 5.6 GHz ≤ 1.8:1 / 50 Ohms
Gain:	750 MHz 1 dBi 870 MHz 1.1 dBi 915 MHz 1.1 dBi 1780 MHz 5.4 dBi 1910 MHz 5.9 dBi 2110 MHz 6.1 dBi 2600 MHz 5.9 dBi 3.4 GHz 6.3 dBi 5.71 GHz 6.9 dBi
Vertical Beamwidth:	Vertical 60°+/-10°
Horizontal Beamwidth:	360°
3 dB Beamwidth Azimuth:	Omnidirectional
3 dB Beamwidth Elevation:	60°
Input Power:	100 Watts
PIM / Passive Intermodulation (2x20W):	IM3: ≤ -160 dBc
Dimensions:	7.59" Diameter x 4.48" Height
Connectors:	N-Type Jack, 12" Pigtail, Plenum-Rated
Application Environment:	Indoor
Weight:	0.8 lb.
Radome:	PC-ABS

CORE™ MULTI-BAND SISO

VENTI GROUP

