




# PIM Rated Omni Ceiling Mount SISO Antenna: 698-3600 MHz + 2.4/5 GHz WiFi

- Super-Low PIM SISO Antenna / 3G, 4G, LTE + 2.4/5 GHz WiFi
- Lowest PIM Rated SISO
- Supports All Carrier Bands + 2.4/5 GHz WiFi



## SISO for 698-3600 MHz + 2.4/5 WiFi

- Greater antenna performance
- Frequency band for multiple carrier deployment / 3G, 4G, LTE + 2.4/5 GHz WiFi
- Incorporates Venti Group Patented Technologies

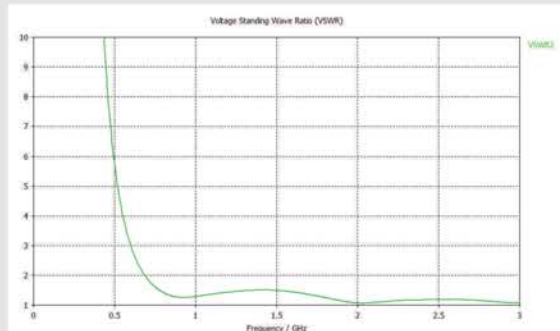

Available in iBwave Designer Version 6.0 and higher

## SPECIFICATIONS

Frequency Range:	698 ~ 960 MHz / 1710 ~ 3600 MHz / 5.5-5.9 GHz WiFi
Polarization:	Vertical
VSWR (typical)/ Impedance:	698 to 3600 MHz 1.5:1 5.6 GHz 1.8:1 / 50 Ohms
Gain:	750 MHz 1 dBi 870 MHz 1.1 dBi 915 MHz 1.1 dBi 1780 MHz 5.4 dBi 1910 MHz 5.9 dBi 2110 MHz 6.1 dBi 2600 MHz 5.9 dBi 3.4 GHz: 6.3 dBi 5.71 GHz: 6.9 dBi
Vertical Beamwidth:	Vertical 60°+/-10°
Horizontal Beamwidth:	360°
3 dB Beamwidth Azimuth:	Omnidirectional
3 dB Beamwidth Elevation:	60°
Input Power:	100 Watts
PIM / Passive Intermodulation (2x20W):	IM3: ≤ -160 dBc
Dimensions:	7.59" Diameter x 4.48" Height
Connectors:	N-Type Jack, 7/16 DIN or Mini DIN Pigtail, plenum-rated
Application Environment:	Indoor
Weight:	0.8 lb.
Radome:	PC-ABS

CORE™ MULTI-BAND SISO VENTI GROUP

